

## SPECIFICATIONS

### SERIES 2 FRAMED BIFOLD MIRROR DOOR

#### DESCRIPTION


Bifold mirror doors consisting of aluminum framed mirror door panels joined by heavy duty hinges and supported by an adjustable lower pivot and spring guides that operate in a top and bottom track.

#### FEATURES

- Extruded and anodized aluminum stiles and rails, attached to the mirror with clear glazing channel and positively fastened with corner connectors.
- Extruded and anodized aluminum universal top and bottom track.
- Track sockets pre-installed in track to provide for lateral adjustment.
- Rubber track bumper pre-installed in track for lateral tension.
- Floating nylon roll guides pre-installed and captured within top and bottom track.
- Adjustable lower bolt and sleeve pivot guide secured by corner connector and adjustable track socket.
- Spring guides secured by top and bottom corner connectors, adjustable track socket, and floating roll guides.
- Pivot guides and spring guides are interchangeable for hinge left or hinge right applications.
- Heavy duty steel hinges positively fasten the panels together for high performance and quiet operation.
- Extruded anodized aluminum low profile edge mount handle adhered to stile with high performance double sided tape.
- 1/8" clear safety backed mirror that conforms to Government Specification DD-M-00411(b), ANSI Standard Z-97.1-19 and CFR Part 1201, Category II.
- Standard frame color: Chrome

#### SIZES

- Finished Opening Heights: 80 1/2", 96" (tolerance + 1/2", - 1/2")
- Finished Opening Widths: two panel - 24", 30", 36"  
four panel - 48", 60", 72"
- Custom sizes available.

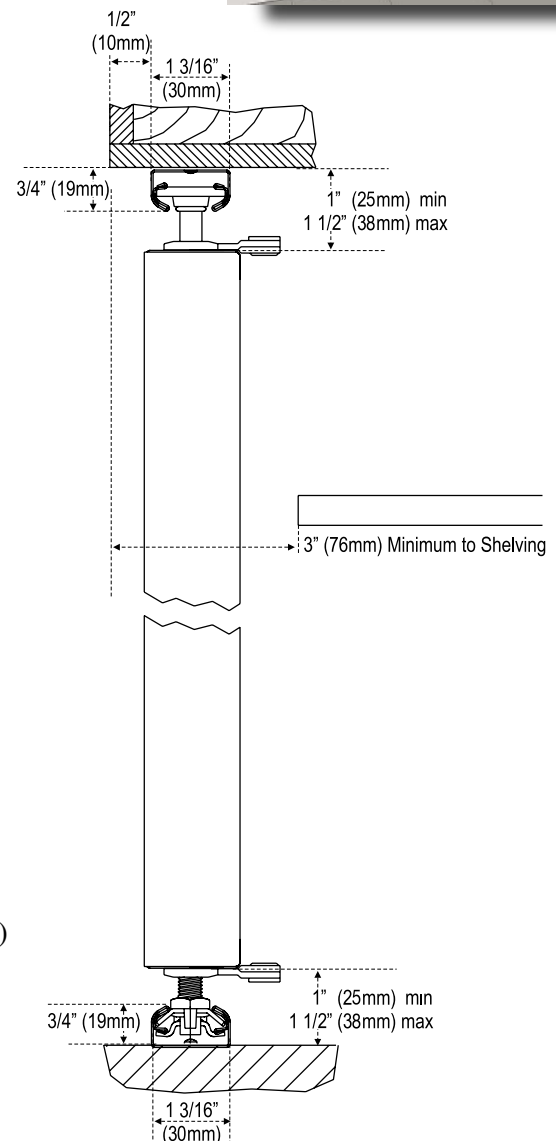

1725 Blaney Troy, Michigan 48084  
phone 248.816.1360 fax 248.816.1866

[www.daiekproducts.com](http://www.daiekproducts.com)

**Daiek**  
PRODUCTS, INC.